
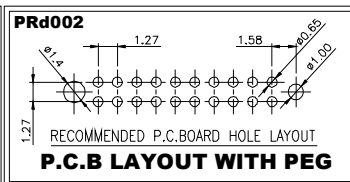
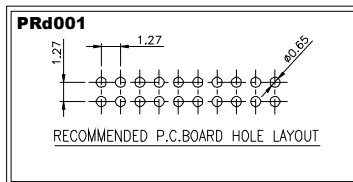
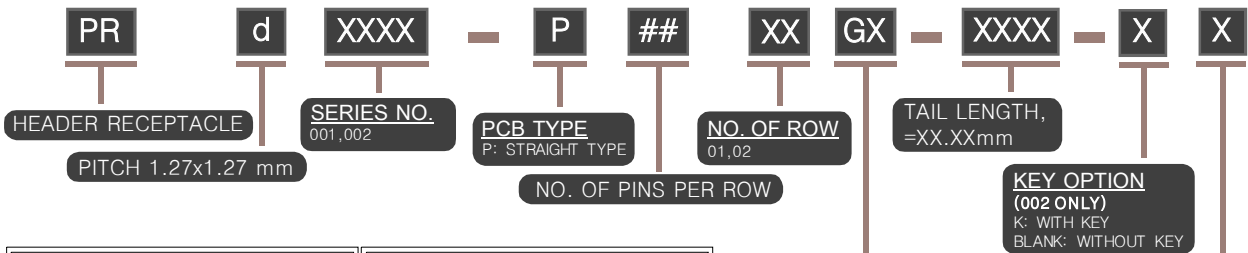


MMI

PIN RECEPTACLE
PITCH: 1.27x1.27mm

1.27x1.27 mm HEADER RECEPTACLE STRAIGHT TYPE - P

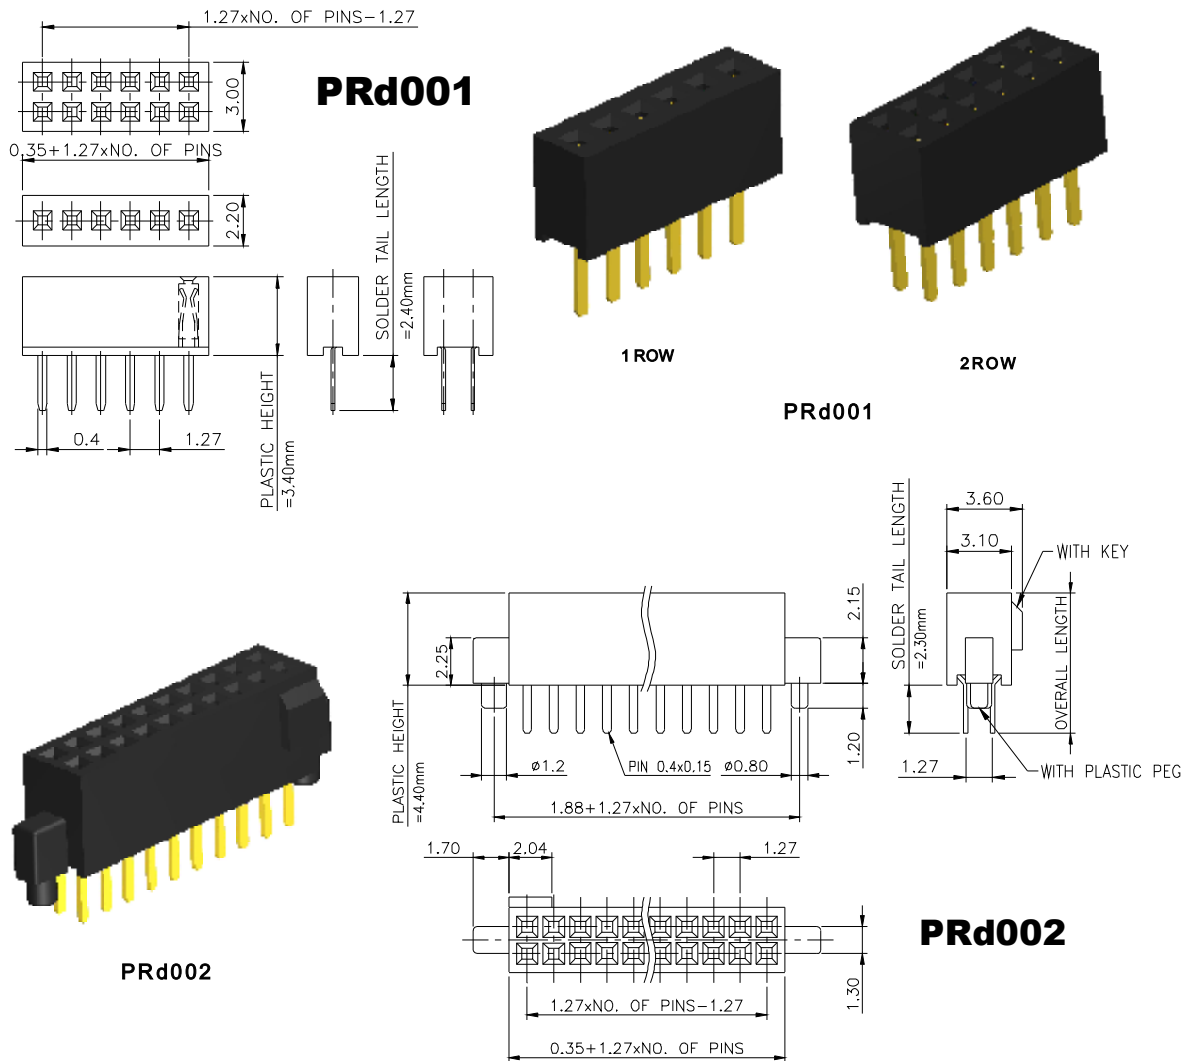

CONTACT PLATING OPTION
 GF: GOLD FLASH
 Gf: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
 G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

PEG OPTION (002 ONLY)
 P: WITH PEG
 BLANK: WITHOUT PEG

SPECIFICATIONS



CURRENT RATING : 3 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 CONTACT RESISTANCE : 20m OHM MAX.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C ~ + 105°C
 CONTACT MATERIAL : BRASS / PHOSPHOR BRONZE

MATERIALS


INSULATOR MATERIAL : STANDARD : P.B.T
 FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE


1.27x1.27 mm HEADER RECEPTACLE STRAIGHT TYPE - P

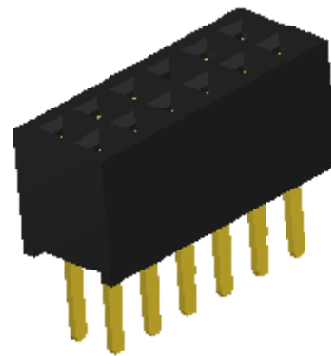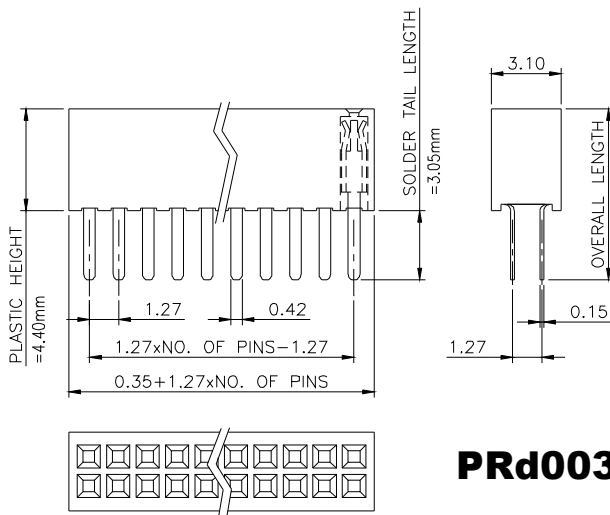

PRd003
STRAIGHT TYPE

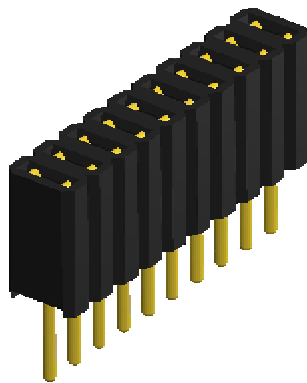

PRd005
STRAIGHT TYPE

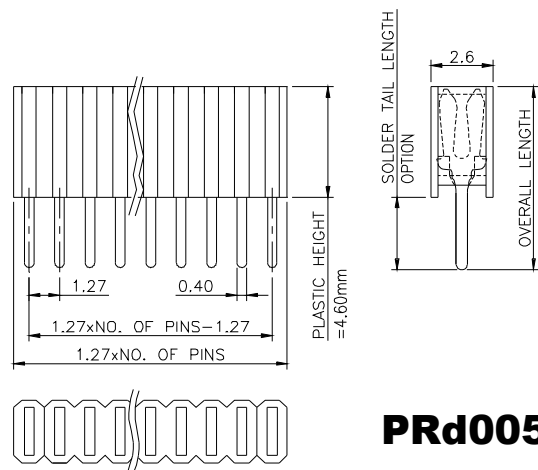

PR	d	XXXX	P	##	XX	GX	XXXX
HEADER RECEPTACLE	PITCH 1.27x1.27 mm	SERIES NO. 003,005	PCB TYPE P: STRAIGHT TYPE	NO. OF PINS PER ROW	NO. OF ROW 01,02	CONTACT PLATING OPTION	TAIL LENGTH, =XX.XXmm (↓ 005 ONLY) 150: 1.50mm 240: 2.40mm 300: 3.00mm

RECOMMENDED P.C.BOARD HOLE LAYOUT

CONTACT PLATING OPTION
 Gf: GOLD FLASH
 Gft: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
 G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
 G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

SPECIFICATIONS


CURRENT RATING : 3 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 CONTACT RESISTANCE : 20m OHM MAX.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C ~ + 105°C
 CONTACT MATERIAL : BRASS / PHOSPHOR BRONZE

MATERIALS

INSULATOR MATERIAL : STANDARD : P.B.T
 FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE

1.27x1.27 mm HEADER RECEPTACLE RIGHT ANGLE TYPE - Pa

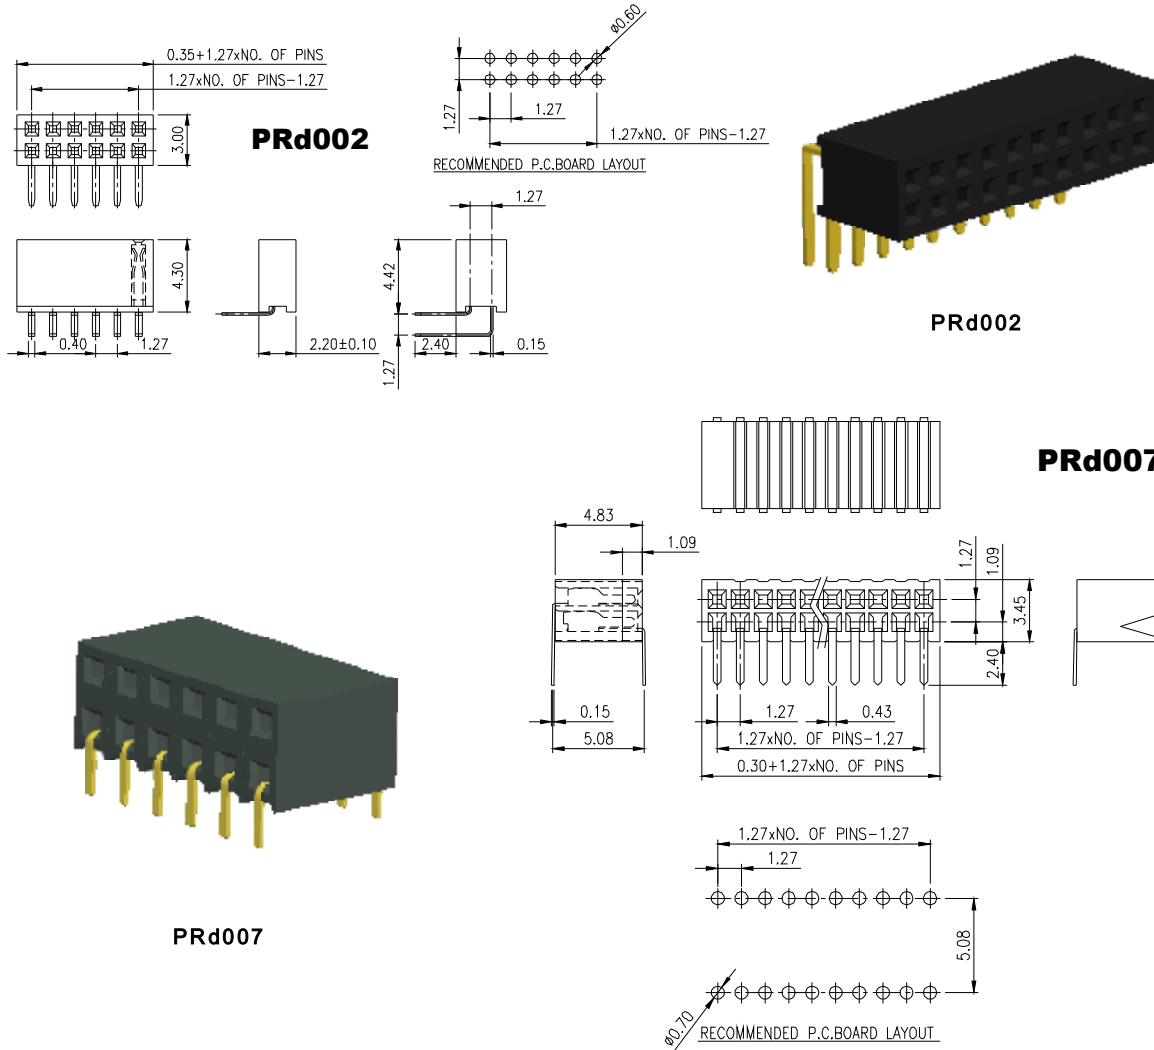

PR	d	XXXX	Pa	##	XX	GX
HEADER RECEPTACLE	PITCH 1.27x1.27 mm	SERIES NO. 002,007	PCB TYPE Pa: RIGHT ANGLE TYPE	NO. OF PINS PER ROW	NO. OF ROW 01,02	CONTACT PLATING OPTION
						Gr: GOLD FLASH Gf: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL G15: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL G30: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL G50: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

SPECIFICATIONS


CURRENT RATING : 3 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 CONTACT RESISTANCE : 20m OHM MAX.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C ~ + 105°C
 CONTACT MATERIAL : BRASS / PHOSPHOR BRONZE

MATERIALS



INSULATOR MATERIAL : STANDARD : P.B.T
 FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE



1.27x1.27 mm HEADER RECEPTACLE SURFACE MOUNT TYPE - Pt

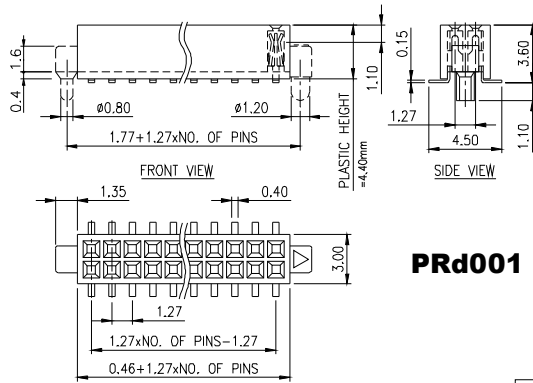


PRd001

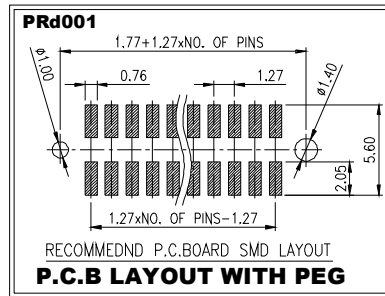

SURFACE MOUNT

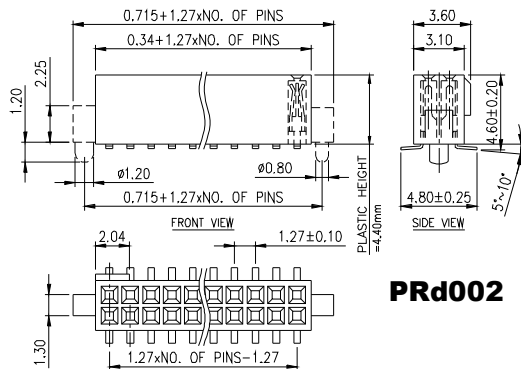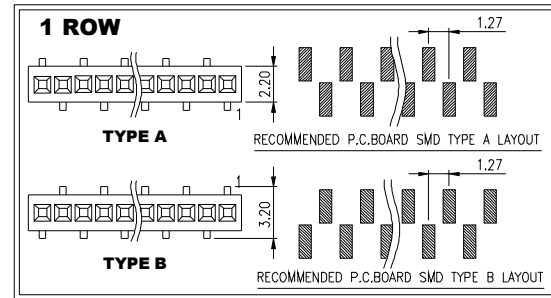

PRd002

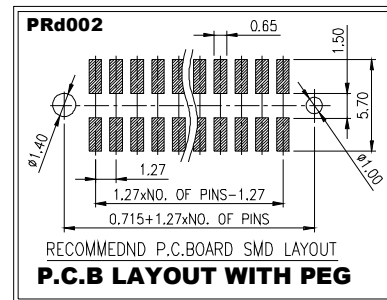

PR	d	XXX	-	Pt	X	##	0X	GX	-	X	X
HEADER RECEPTACLE	PITCH 1.27X1.27mm	SERIES NO. 001, 002		PCB TYPE Pt: SURFACE MOUNT TYPE	SMD TYPE (ONLY SINGLE ROW) A: TYPE A B: TYPE B	NO. OF ROW 01, 02		CONTACT PLATING OPTION Gf: GOLD FLASH Gf: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL	KEY OPTION (PRd002 ONLY) K: WITH KEY BLANK: WITHOUT KEY	PEG OPTION P: WITH PEG BLANK: WITHOUT PEG	 PEG

SPECIFICATIONS

CURRENT RATING : 3 AMPS.
INSULATOR RESISTANCE : 5000 OHM MIN.
CONTACT RESISTANCE : 20m OHM MAX.
DIELECTRIC WITHSTANDING : AC 500 V.
OPERATING TEMPERATURE : - 40°C ~ + 105°C
CONTACT MATERIAL : BRASS / PHOSPHOR BRONZE




MATERIALS

INSULATOR MATERIAL : STANDARD : NYLON 6T
FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING




NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE

1.27x1.27 mm HEADER RECEPTACLE SURFACE MOUNT TYPE - Pt



PRd004

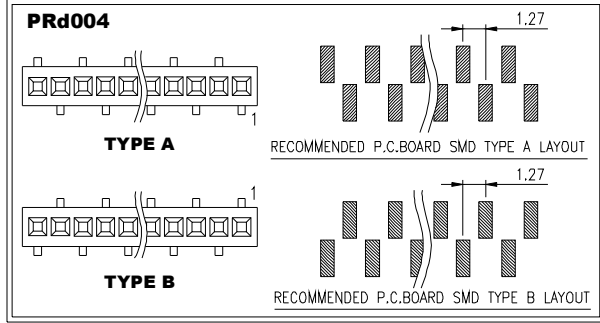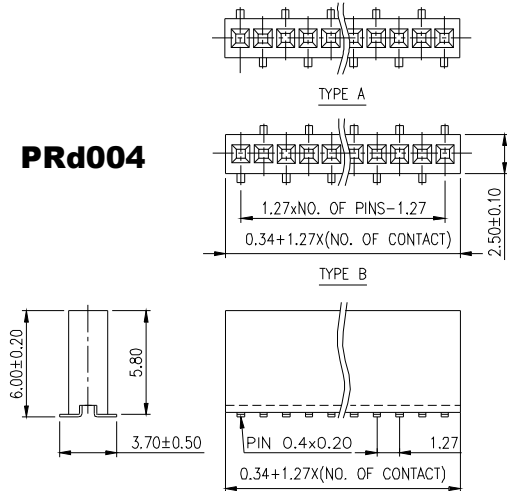

PRd004
SURFACE MOUNT TYPE

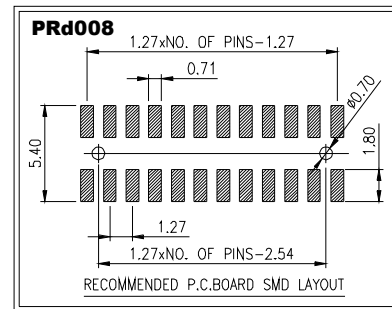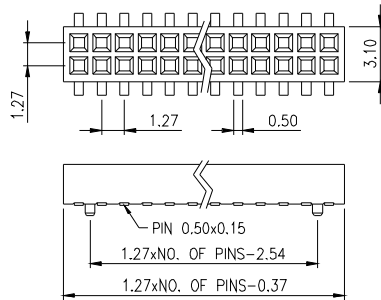

PRd008

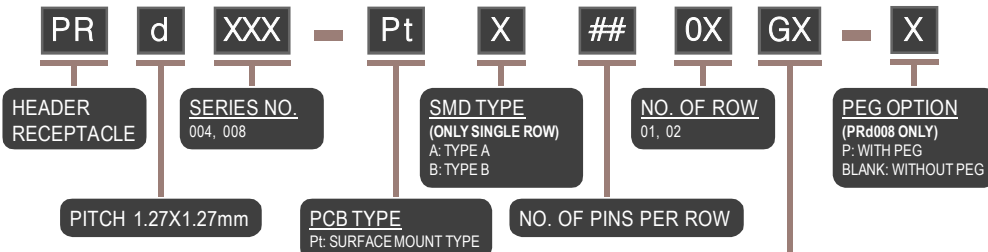

SPECIFICATIONS



CURRENT RATING : 3 AMPS.
INSULATOR RESISTANCE : 5000 OHM MIN.
CONTACT RESISTANCE : 20m OHM MAX.
DIELECTRIC WITHSTANDING : AC 500 V.
OPERATING TEMPERATURE : - 40°C ~ + 105°C
CONTACT MATERIAL : BRASS / PHOSPHOR BRONZE

MATERIALS


INSULATOR MATERIAL : STANDARD : NYLON 6T
FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE


1.27x1.27 mm HEADER RECEPTACLE SURFACE MOUNT TYPE - Pt

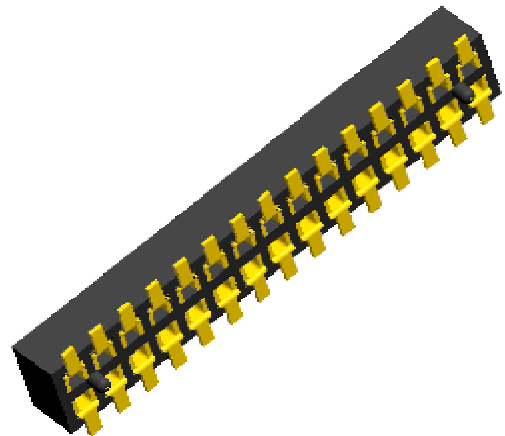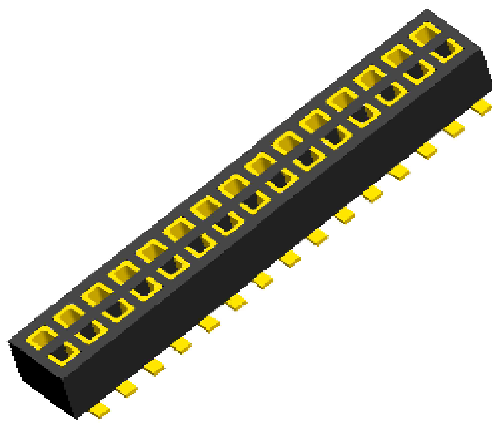


SURFACE MOUNT TYPE

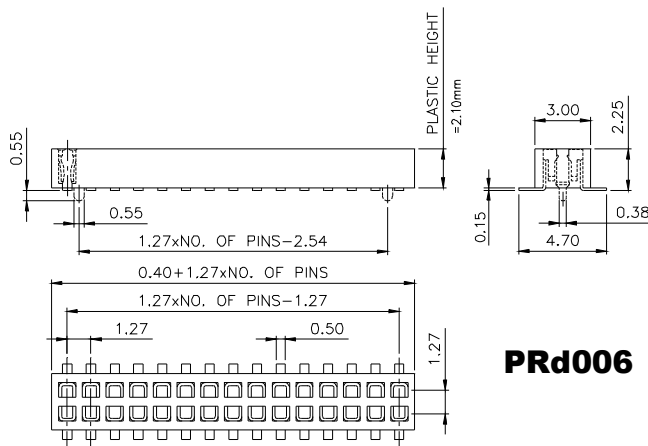

PRd006

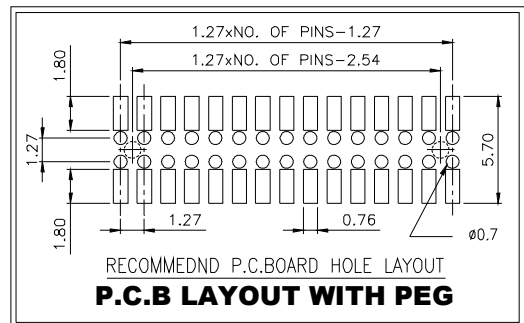

PR	d	006	-	Pt	##	02	GX	-	X
HEADER RECEPTACLE PITCH 1.27x1.27 mm	SERIES NO. 006: TOP ENTRY TYPE			PCB TYPE Pt: SURFACE MOUNT TYPE	NO. OF PINS PER ROW	NO. OF ROW 02			PEG OPTION P: WITH PEG BLANK: WITHOUT PEG
									 PEG

SPECIFICATIONS


CURRENT RATING : 3 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 CONTACT RESISTANCE : 20m OHM MAX.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C ~ + 105°C
 CONTACT MATERIAL : BRASS / PHOSPHOR BRONZE

MATERIALS


INSULATOR MATERIAL : STANDARD : NYLON 6T
 FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE

1.27x1.27 mm HEADER RECEPTACLE R / A SURFACE MOUNT TYPE - Rt

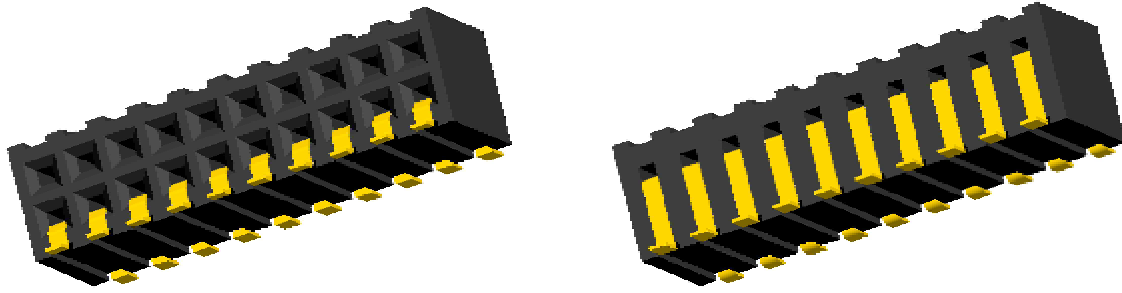

R/A SURFACE MOUNT TYPE

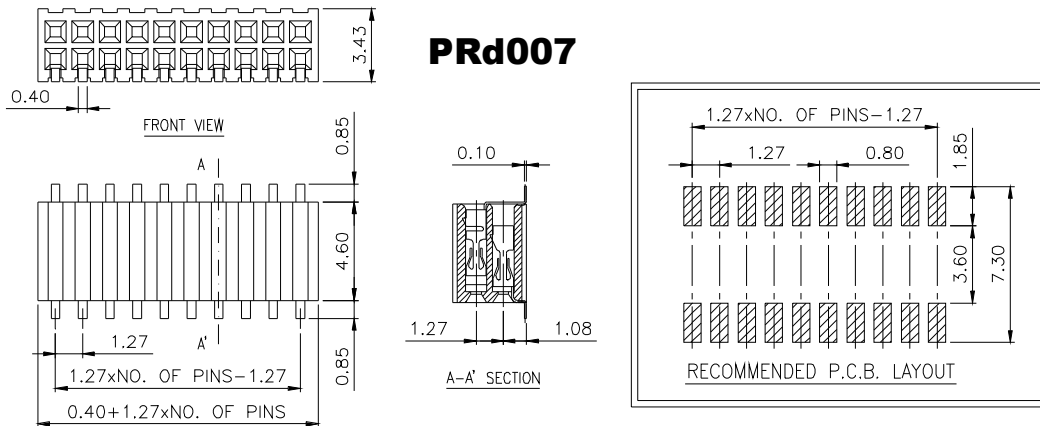

PR	d	007	Rt	##	XX	GX
HEADER RECEPTACLE		SERIES NO. 007: SIDE ENTRY TYPE	PCB TYPE Rt: RIGHT ANGLE SURFACE MOUNT TYPE	NO. OF PINS PER ROW	NO. OF ROW 02	CONTACT PLATING OPTION
PITCH 1.27x1.27 mm						Gf: GOLD FLASH Gft: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

SPECIFICATIONS

CURRENT RATING : 3 AMPS.
 INSULATOR RESISTANCE : 5000 OHM MIN.
 CONTACT RESISTANCE : 20m OHM MAX.
 DIELECTRIC WITHSTANDING : AC 500 V.
 OPERATING TEMPERATURE : - 40°C ~ + 105°C
 CONTACT MATERIAL : BRASS / PHOSPHOR BRONZE

MATERIALS

INSULATOR MATERIAL : STANDARD : NYLON 6T
 FINISH : GOLD FLASH OR TIN PLATED OR DUPLEX PLATING

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE