


MMI


PIN RECEPTACLE
PITCH: 0.80x1.20mm

0.80x1.20 mm HEADER RECEPTACLE SURFACE MOUNT TYPE - Pt

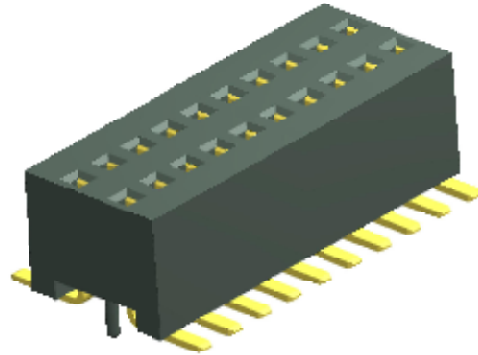

2 ROW

SURFACE MOUNT TYPE

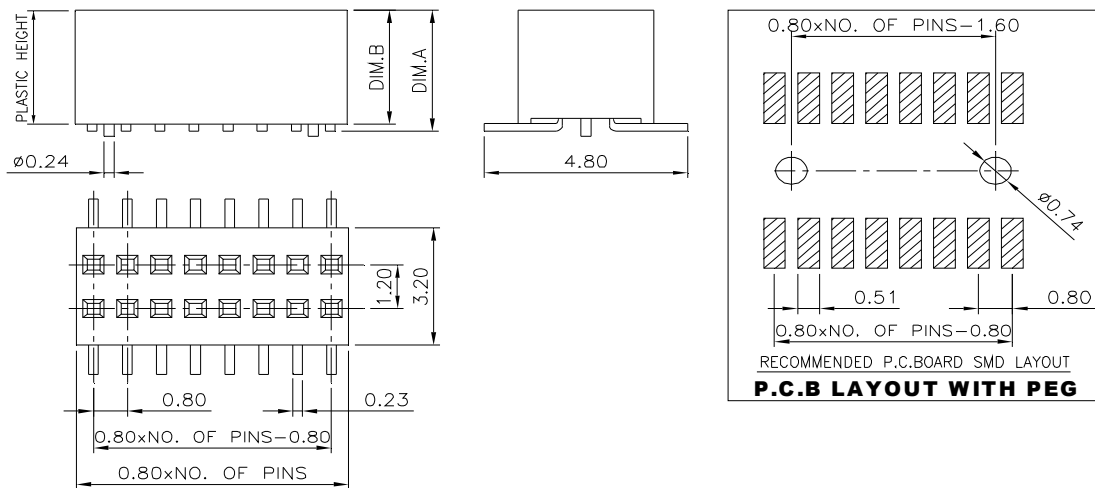

PR HEADER RECEPTACLE
PITCH 0.80x1.20 mm

m **XXXX** SERIES NO. PLASTIC HEIGHT = XX.XXmm

Pt PCB TYPE
Pt: SURFACE MOUNT TYPE

**02** NO. OF ROW
02

GX **X** **XX** PEG OPTION
P: WITH PEG
BLANK: WITHOUT PEG

CONTACT PLATING OPTION
Gf: GOLD FLASH
Gf: GOLD FLASH ON CONTACT, TIN PLATED ON SOLDER TAIL
G15t: 15u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
G30t: 30u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL
G50t: 50u" GOLD ON CONTACT, TIN PLATED ON SOLDER TAIL

PEG

CAP OPTION
CP: WITH CAP
BLANK: WITHOUT CAP

DETAIL OF CAP

SERIES NO.	DIMENSION	
	A	B
001	3.30	3.12
002	2.61	2.47

SPECIFICATIONS

CURRENT RATING : 0.75 AMPS.
INSULATOR RESISTANCE : 5000 OHM MIN.
DIELECTRIC WITHSTANDING : AC 500 V.
OPERATING TEMPERATURE : - 40°C ~ + 105°C
CONTACT MATERIAL : PHOSPHOR BRONZE

MATERIALS

INSULATOR MATERIAL : NYLON-6T, UL94V-0
PLATING : GOLD FLASH
MAX. PROCESSING TEMP:
230° FOR 30-60 SECONDS (260° FOR 10 SECONDS)

NOTE : SOME SIZES, STYLES AND OPTION ARE NON-STANDARD, NON-CANCELLABLE, NON-RETURNABLE